COMUNELLO
AUTOMATION

Life made easy

EAGLE

UNDERGROUND ACTUATOR
230V AND 24V VERSIONS




MADE IN COMUNELLO

EAGLE

Technical features


Available with Encoder versions

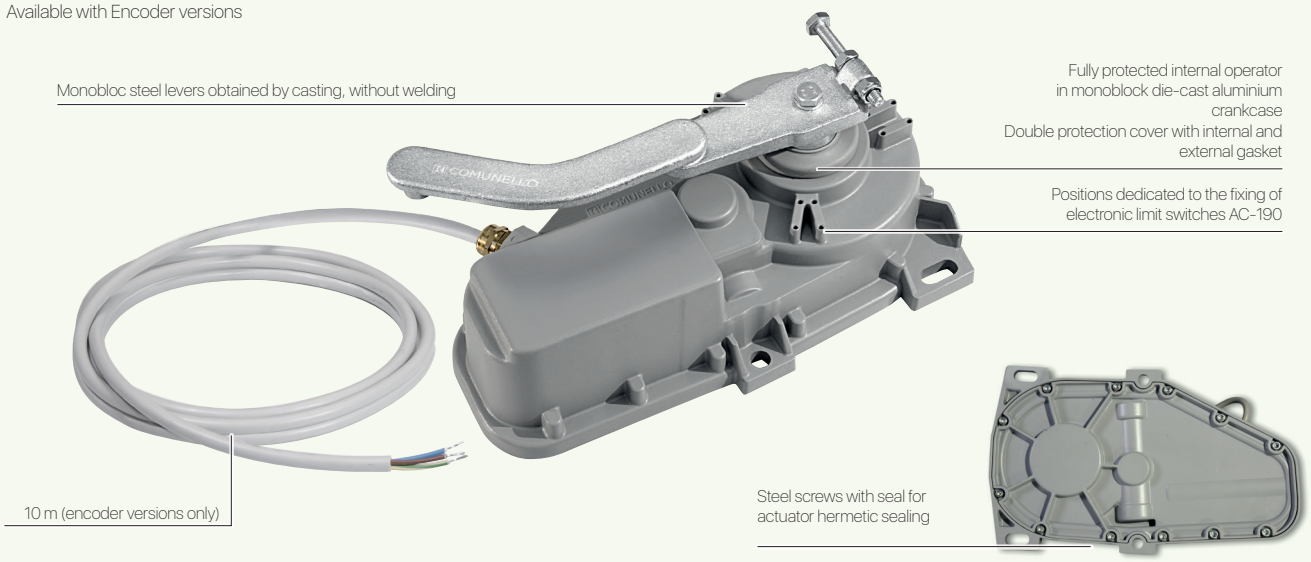


TECHNICAL CHARACTERISTICS

	24V	230V
Operating power supply	24 VDC	230 VAC
Power consumption	150 W	280 W
Max. absorption	6,5 A	1,2 A
Torque	220 Nm	300 Nm
Duty cycle	Intensive use	50%
Protection degree (IP)	IP67	IP67
Insulation class	2	1 (earthing)
Working temperature	-20°C / +50°C	-20°C / +50°C
Speed	0,1 Rad/s	0,08 Rad/s
Weight	11,3 Kg	11,6 Kg

DIMENSIONS (mm)

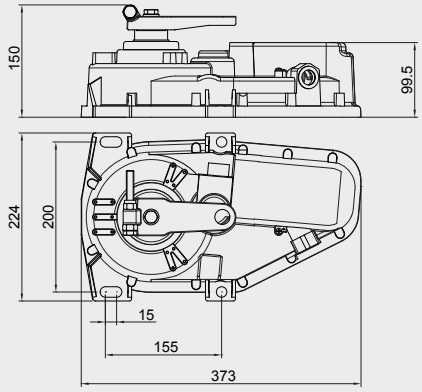

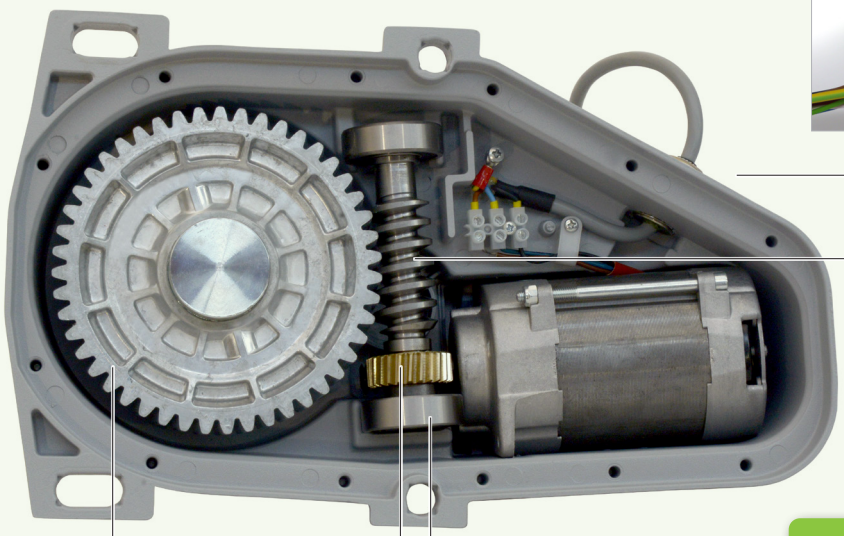



Steel cable gland fully resin-coated internally and neoprene cable

Gears lubrication with arctic grease

Die-cast high elastic strength zamak cogwheel


Reduction shaft with bearings and gears in steel and bronze

-40°C / +40°C artic bearings

100% TESTED

Every single product is duly tested at the end of each assembly line



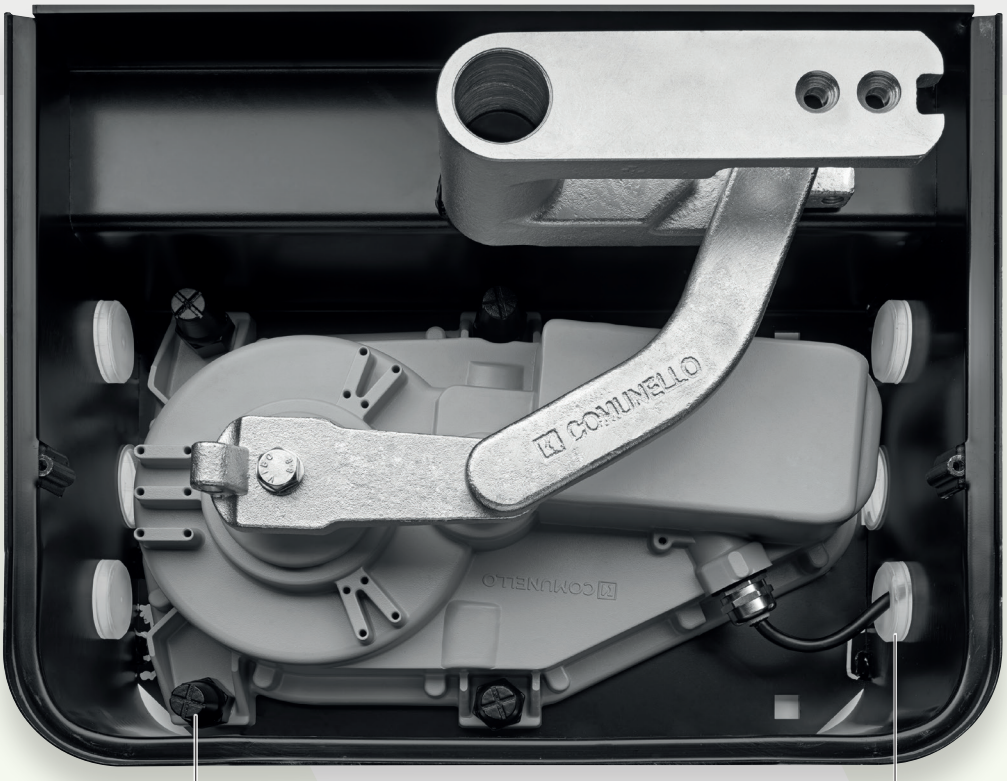

COMUNELLO® Copyright 2020 - All rights reserved



OFFICIAL DEALER:

ACCESS AUTOMATION & SUPPORT
www.aands.be

A&S
Groenbek 25 - 8790 Waregem
info@aands.be
T. +32 56 25 45 60
F. +32 56 25 45 61

COMUNELLO AUTOMATION

AUTOMATION FOR GATES, DOORS AND BARRIERS

FRATELLI COMUNELLO S.P.A.

HEADQUARTERS
Via Zarpellon, 33
36027 San Giuseppe di Cassola, Vicenza, Italy
Tel. +39 0424 585111 Fax +39 0424 533417
info@comunello.it www.comunello.com

REGISTERED OFFICE
Via Cassola,64 - C.P.79
36027 Rosà, Vicenza, Italy
Tel. +39 0424 585111 Fax +39 0424 533417
info@comunello.it www.comunello.com